



# 1 Hour Fire Rated Hatch

FRL 60 / 60 / 60

## Description

FYREGUARD-HATCHES are designed to sit flush with the ceiling or wall surface leaving a narrow opening joint around the face. The hatch is secured with a locking key or can be individually keyed for maximum security.

## Users

FYREGUARD-HATCHES are both fire rated and standard. All hatches have fully concealed hinges and provide lockable security access to services. The hatches can be installed during construction or after the wall or ceiling has been lined.

## Sizes

Both FYRE-HATCHES and standard hatches can be manufactured to suit individual requirements.

The maximum size of a FYRE-HATCH is:

700mm x 700mm

Stock sizes of standard hatches are:

600mm x 600mm

530mm x 530mm

450mm x 450mm

300mm x 300mm

## Installation

See back of sheet for installation details.

## Specification



Install Fyreguard Fire Rated Hatch to wall/ceiling as indicated on drawings to manufacturers instructions. For ceilings ensure the supporting framework is independently supported with hangers from the building structure and the hatch weight is not taken by the ceiling. All work to be certified by the installer in an approved manner.

## Fire Test Data

FYRE-HATCH has been tested to Australian Standard AS 1530. 4 and attained an FRL of 60/60/60; including incipient spread of fire.



## More Data

For data on access hatches and panels to suit other fire rated wall and ceiling systems contact your nearest Fyreguard Qld office. We reserve the right to change specifications without notice.

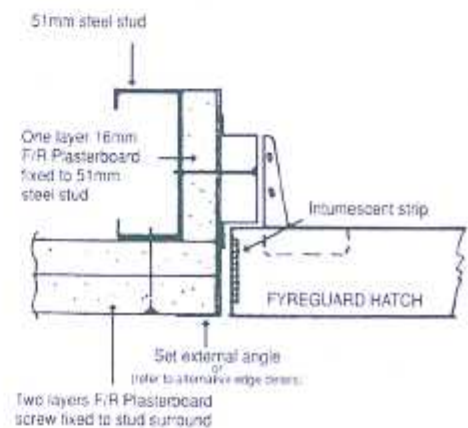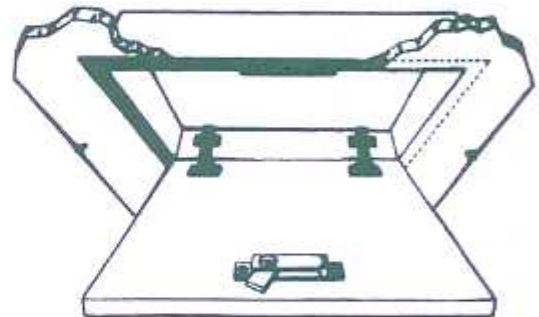

EDGE DETAIL  
FYREGUARD ONE (1) HOUR HATCH  
FLUSH FITTING - CONCEALED HINGES-  
RIM LOCK

## ALTERNATIVE EDGE DETAILS

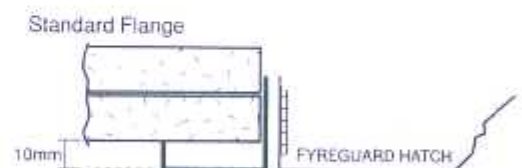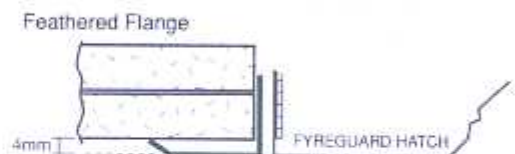

8 Cromwell Street, Collingwood VIC 3066 ABN 80 054 033 135

Phone 03 9419 1393 Fax 03 9419 1392


Email [frsadmin@bigpond.com](mailto:frsadmin@bigpond.com) [www.fireratingsolutions.com.au](http://www.fireratingsolutions.com.au)



# INSTALLATION INSTRUCTIONS


## FYREGUARD 1 HOUR FIRE RATED CEILING HATCH FIXING INSTRUCTIONS

1. Mark and cut out opening in ceiling - to match dimensions of Hatch (eg 600 x 600).
2. Cut and place 51mm steel stud trimmers 16mm back from edge of opening. Position 16mm fire rated plasterboard facing strips on face of stud and screw fix.
3. Place external angle bead around opening. Lift hatch into position check external bead lines up with edge of hatch and the opening is the correct size. Remove hatch and "set" external angle.
4. Mark line at level of door frame above opening. Open hatch and secure into frame surrounds to this line. Close and check hatch door is positioned correctly, drill and fix permanent screws (Minimum 2 fixings per side).
5. Seal around hatch frame surrounds and fire rated plasterboard with Promaseal Mastic
6. Connect safty chain & lock hatch door.

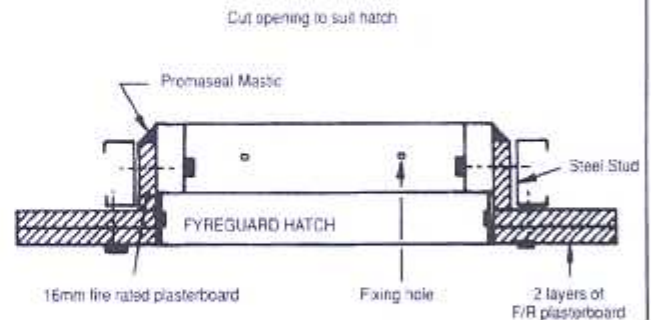


## FYREGUARD FIRE RATED HATCH IN MASONRY WALL FIXING DETAIL

1. Match Fyre-hatch to wall opening.
2. Mark line at level of door frame in from face of opening. Open hatch door and secure frame surround through hole in to masonry with 60 x 8mm masonry anchors (Minimum 2 Fixings on opposite sides).
3. Seal around hatch frame surround and masonry using Promaseal Mastic
4. Shut hatch and engage lock.

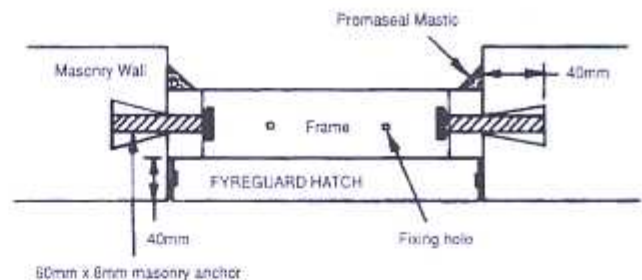

## FYREGUARD FIRE RATED HATCH IN LIGHT WEIGHT WALL FIXING DETAIL

1. Frame Opening with 51mm steel stud and trim with 16mm fire rated plasterboard to required opening size.
2. Match Fyre-Hatch to wall opening.
3. Cut and place external angle bead around opening. Lift hatch into position check external bead, Remove hatch and "set" external angle.
4. Mark line at level of door frame in from face of opening. Open hatch door and sercure frame surround into steal stud frame with 45 x 8 SF screws.
5. Seal around hatch surround and fire rated plasterboard with Promaseal Mastic
6. Shut hatch and engage lock.

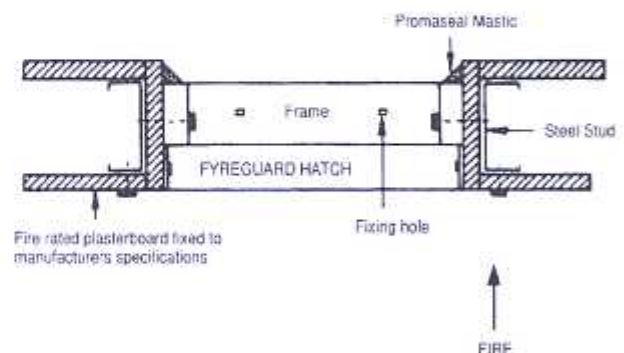

NON-RATED HATCHES ARE INSTALLED AS ABOVE WITHOUT THE USE OF PROMASEAL MASTIC AND WITH ADJUSTMENTS FOR LID THICKNESS

8 Cromwell Street, Collingwood VIC 3066 ABN 80 054 033 135

Phone 03 9419 1393 Fax 03 9419 1392

Email [frsadmin@bigpond.com](mailto:frsadmin@bigpond.com) [www.fireratingsolutions.com.au](http://www.fireratingsolutions.com.au)